

ALTUM VELVET

Technical details

Manufacturing method	Tufted
Pile type	Cutpile
Dyeing method	Piece dyed
Pile content	100 % ECONYL® recycled polyamide
Gauge	5/64
Backing	Bitumen with glasfiberscrim
Pile weight	ca 1000 gr/m ²
Pile height	ca 5,0 mm
Total Thickness	ca. 8,0 mm
Total weight	ca 4450 gr/m ²
Tuft density	ca. 328 000 /m ²
Dimension	50 x 50 cm
Flammability classification	Bfl S1 according to EN 13501-1
Electrostatic properties	Walking Test < 2,0 KV
	Resistance ≥ 10 ¹⁰
Suitability	EN1307 - 32 - Commercial General
Sound absorption	ΔLw - 25 dB - ISO 140-8
Colour fastness:	
To light	≥ 7 according to ISO 105-B02
To rubbing	≥ 4 according to ISO 105-X12

602 ...	20	89	40	50
	30	80	42	61
	23	38	76	64
	75	70	65	60



Maintenance

The fibre blend used has exceptional resistance to soiling and facilitates the use of recognised cleaning solutions.

This carpet must be sold and installed in accordance with BS5325. Chair mats are recommended for use under castor chairs.


All specifications are subject to normal commercial tolerances and subject to change where they improve the product's performance.

Pile reversal / shading

Carpets may be subject to permanent pile reversal, also known as "shading" or "water-marking".


The pile in certain areas may become distorted, giving the appearance of areas of light and shade. No specific cause of this has been identified and it is no manufacturing fault.

We reserve the right to make technical alterations and improvements to this product. Colour variations from the original sample can occur.



also available on roll

Installation

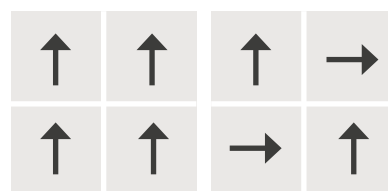

16



EN 1307

Manufactured by: TAPIBEL nv.
Industrielaan 4 - B-3900 Overpelt
DOP 000602T-001 - EN 14041

ALTUM VELVET

For use as floor covering in buildings
(EN 14041) according to the manufacturer's specifications

TÜV Emission testing - The results comply with the emission threshold of:

AgBB - Germany French VOC regulation
Belgian VOC regulation LEED V4 (outside North America)
BREEAM Exemplary level



www.incati.be - sales@incati.be

Tel : +32 11 80 48 50 - Fax: +32 11 64 75 46 Industrielaan 4 - Nolimpark 1319 B-3900 Overpelt - Belgium

INCATI
Innovative Carpet Tiles
by TAPIBEL