PRESIDENT E

Technical details

Manufacturing method		Tufted
Pile type		Frisé 3 Ply Heatset Twist - Cutpile
Dyeing method		Solution Dyed
Pile content		100% ECONYL [®] regenerated Polyamide
Gauge		1/10
Backing		Bitumen with glasfiberscrim
Pile weight		ca. 1300 gr/m ²
Pile height		ca. 5,5 mm
Total Thickness		ca. 8,5 mm
Total weight :		ca. 4800 gr/m²
Tuft density		ca. 189 000/m²
Dimension		50 x 50 cm
Flammability classification		Bfl S1 according to EN13501-1
Electrostatic properties		Walking Test < 2,0 KV
		Resistance ≥ 10 ¹⁰
Suitability		EN1307 - 33 - Commercial Heavy
Sound absorption		32 dB - ISO 140-8
Colour fastness :	To light	≥ 7 according to ISO 105-B02
	To rubbing	≥ 4 according to ISO 105-X12
Bleach resistance		Yes

Maintenance

The fibre blend used has exceptional resistance to soiling and facilitates the use of recognised cleaning solutions.

This carpet must be sold and installed in accordance with BS5325. Chair mats are recommended for use under castor chairs.


All specifications are subject to normal commercial tolerances and subject to change where they improve the product's performance.

Pile reversal / shading

Carpets may be subject to permanent pile reversal, also known as "shading" or "water-marking".

The pile in certain areas may become distorted, giving the appearance of areas of light and shade. No specific cause of this has been identified and it is no manufacturing fault.

We reserve the right to make technical alterations and improvements to this product. Colour variations from the original sample can occur.

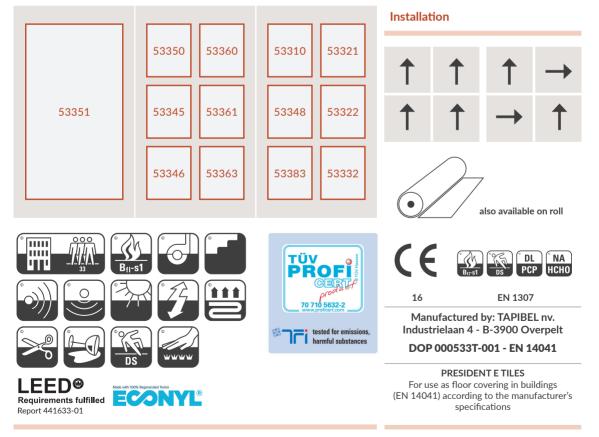

www.incati.be - sales@incati.be Tel : +32 11 80 48 50 - Fax: +32 11 64 75 46 Industrielaan 4 - Nolimpark 1319 B-3900 Overpelt - Belgium

